



220~240V AC Interconnectable Heat Alarm with 9V Battery Back-Up (Fixed Temperature Type)

Model: SS-1263



SS-1263

Main Features

- Interconnectable (Up To 40 Garvan's AC Smoke And/Or Heat Alarms)
- Easy installation and maintenance
- 9V battery back-up (BATTERY INCLUDED)
- Alarm / Power Indicator
- Test button
- Low battery signal
- 60°C Fixed Temperature Type
- High stability and reliability
- Loud 85dB alarm signal
- Anti-tamper Lock
- Cannot be installed with battery missing
- Supplied with fixing kit

Description

The Garvan SS-1263 Heat Alarm are intended to be supplementary to Smoke Alarms and should only be placed in areas where smoke alarms cannot be used. The SS-1263 is Fixed Temperature Type 220 - 240V AC Heat alarm with battery back-up for single or multiple station use. It continues to operate when house power fails. The SS-1263 has an 85 decibel horn, test button, separate power and alarm LED indicators, tamper-resistant locking pin. This unit also has a safety battery clip which will not allow the mounting of the smoke alarm without 9V battery installed.

This unit is interconnectable to other Garvan's AC smoke or heat alarms of the same make and type. This interconnect feature allows up to 40 Heat Alarms and / or Smoke Alarms to be connected together over 150 metres maximum, using the single white wire, and thus allowing all alarms to sound when any one is activated.

The SS-1263 Heat Alarm is ideal for kitchens, garages, cellars, boiler rooms, attics and other areas where there are normally high levels of fumes, smoke or dust which preclude the use of smoke alarms due to the risk of false alarms.

Operation

Once the heat alarm has been installed a small GREEN indicator light (LED) should be visible through the alarm grill indicating that AC supply is healthy. A RED indicator light (LED) should also flash approximately once a minute to indicate the battery is healthy and the unit is operating properly. It gives a fire warning when the temperature at the unit reaches 60°C (+/-5°C).

Wiring & Interconnect facility

Interconnection facilities for up to 40 alarms over 150 metres maximum, using only three wires, including AC power. When one alarm sounds, all properly interconnected smoke/heat alarms follow.


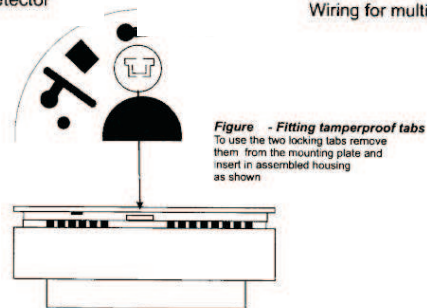


Figure - Fitting tamperproof tabs
To use the two locking tabs remove them from the mounting plate and insert in assembled housing as shown

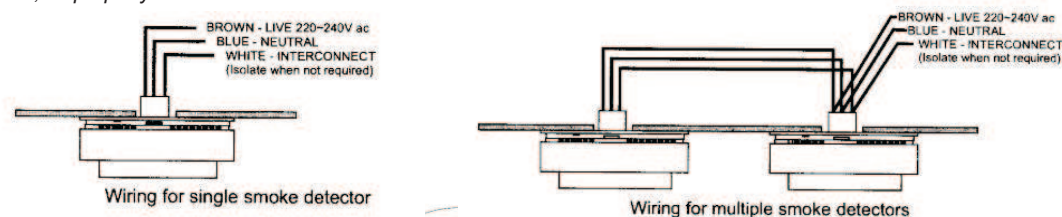

Model: NP-3

Mounting Pattress For Heat alarm

The Garvan NP-3 surface pattress is suitable for the use of AC smoke alarms SS-1238S, SS-1208S and heat alarm SS-1263 where surface cabling is being used. This is designed for installation by a qualified electrician. Knockouts on the underside provide flexibility of cable entry, for ease of use.

PRODUCT SPECIFICATIONS:

Description	Mains Powered Heat Alarm (Fixed Temperature Type) with Interconnect Feature, & 9V Battery back-up
Model number	SS-1263
Power Source	220-240Vac~ 50-60Hz 9V battery back-up (battery included)
Battery Back-up	9Vdc Alkaline or Carbon Zinc battery - GOLD PEAK GP1604P, GOLDEN POWER 1604D, EVEREADY PP3S, DURACELL MN16049V
Battery Back-up Life	In the event of a break in the mains supply the battery will give detector operation for 1 year minimum
Operation Current	<20mA operation (In Alarm)
Temperature Rating	60°C Fixed temperature +/-5°C
Maximum Ambient	40°C
Recommended Coverage	200m ²
Recommended Spacing	13.5m
Maximum Distance from wall	7.7m
Interconnecting	40 Alarms (Can be interconnected with any GARVAN's AC Smoke and /or Heat Alarm over 150 metres maximum)
Plastic Material	Imflamable ABS plastic
Overall Dimensions	6.1 cm (H) X 12 cm (Diameter)
Colour	Bright White
Alarm Sound Level	85 Decibels at 3 metres minimum
Visual Indicators	Green LED for Mains Power ON Red LED for Warning
Heat Alarm Assembly	Heat Alarm Base fitted Fitted in bubble wrap Mains lead connected Plastic Dust Cover (Optional, not include in the standard packing) Gasket 9V Carbon Zinc Battery
Mains Lead	With appropriate mains socket fitted, 3 wires Live Brown, Neutral Blue, and Interconnect white. Wire size 18 AWG stranded 105°C. 21 cm long (+/- 0.5cm)
Fixing kit assembly	2 fixing screws 2 rawlplugs in polythene bag
Packing	Colour Gift box, with hanging tab Contents: Heat detector assembly Instruction leaflet Fixing kit assembly
Warranty	5 years warranty
Approvals	CE

Packaging

Gift Box



Shipping Specifications:

Gift Box :	
Individual Carton Dimensions	55.5cm x 41.5 x 29.5cm
Inner carton quantity	12
Export carton quantity	48
Export carton weight	14 kgs
Quantity per 20ft' container	18,720pcs

GARVAN ENTERPRISES LTD.

Rm. 16-17, 21/F., Wing Hing Ind. Bldg., 83-93 Chai Wan Kok St., Tsuen Wan, N.T. Hong Kong.
Tel: (852) 2402 8768 Fax: (852)2417 2528

Visit us on the web at www.garvan.com.hk

GARVAN ENTERPRISES LTD.

Rm. 16-17, 21/F., Wing Hing Ind. Bldg., 83-93 Chai Wan Kok St., Tsuen Wan, N.T. Hong Kong.
Tel: (852) 2402 8768 Fax: (852)2417 2528

Visit us on the web at www.garvan.com.hk